



# Surface Mounted I.V. Track & I.V. Carrier

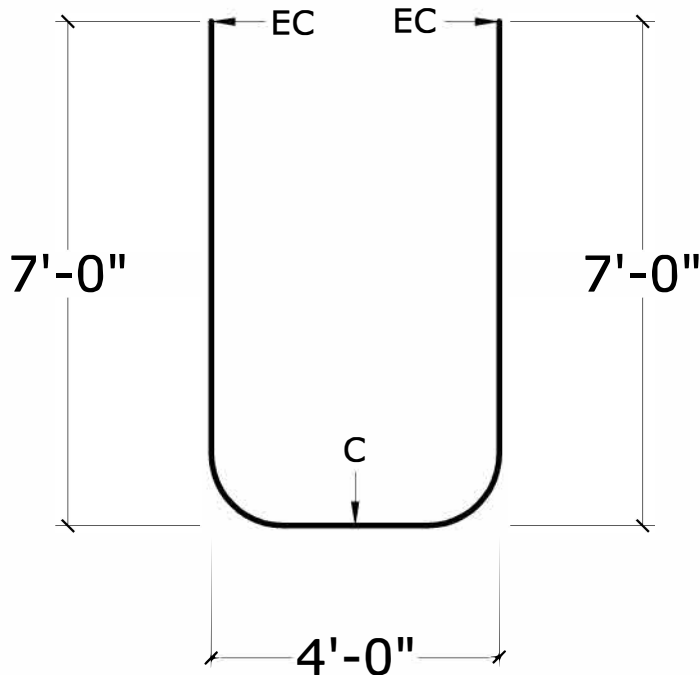

MATERIAL	Extruded Aluminum
FINISH	Satin Anodized or White Baked Enamel
BENDS	All bends shall be 12" radius and up to 90 degrees
IV CARRIERS	NC-100-Aluminum carriage, 4 nylon wheels, stainless steel IV loop, locking nylon bushing. Locks into place with a single 180 degree twist. per track total


## 1100IV



### TYPICAL 1100IV TRACK PARTS:

**1107 End Cap:** Aluminum End Cap is used as a permanent stop for curtain carriers. It is secured to the track with two (2) screws.

**1108 Connector:** Aluminum Connector is used to join two pieces of track. It is secured with four (4) rivets, two per track piece.

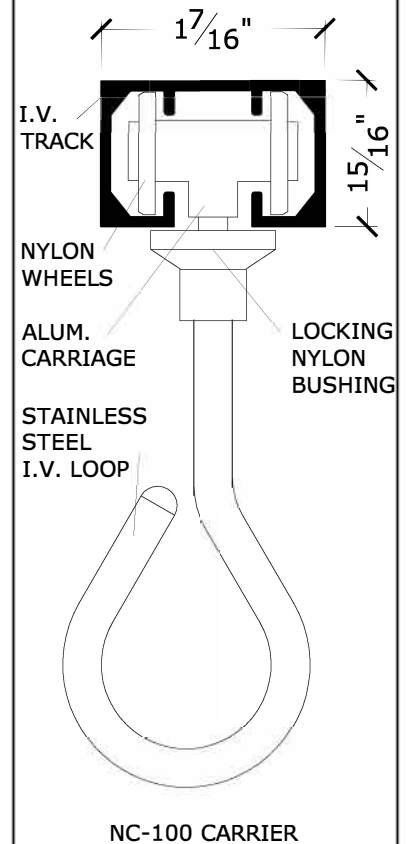

ARCHITECT		DATE	
CONTRACTOR		DATE REV	
DISTRIBUTOR		DRAWN BY	
PROJECT		JOB #	
		SHEET	